


IDE – Bus

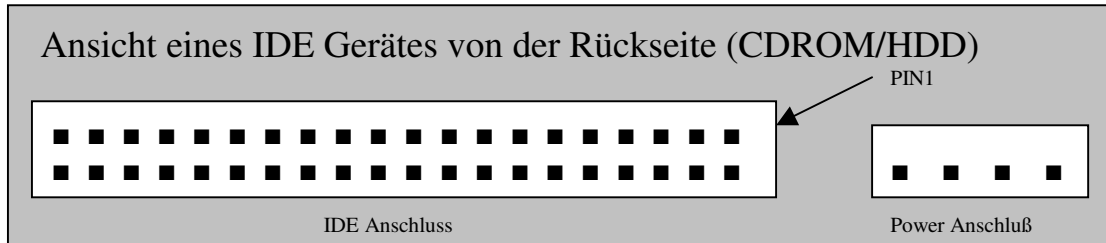

IDE Anschluss Kontaktbelegung							
Dir.	Signal	Pin Nr.			Pin Nr.	Signal	Dir.
E	/RESET	1	■	■	2	GND	E
E/A	DB7	3	■	■	4	DB8	E/A
E/A	DB6	5	■	■	6	DB9	E/A
E/A	DB5	7	■	■	8	DB10	E/A
E/A	DB4	9	■	■	10	DB11	E/A
E/A	DB3	11	■	■	12	DB12	E/A
E/A	DB2	13	■	■	14	DB13	E/A
E/A	DB1	15	■	■	16	DB14	E/A
E/A	DB0	17	■	■	18	DB15	E/A
E	GND	19	■	■	20	KEYPIN	N.C.
A	DMAREQ	21	■	■	22	GND	E
E	/DIOW	23	■	■	24	GND	E
E	/DIOR	25	■	■	26	GND	E
A	IORDY	27	■	■	28	SPINDEL SYNC.	E/A
E	/DMAACK	29	■	■	30	GND	E
A	INTRQ	31	■	■	32	/IOCS16	A
E	ADDR1	33	■	■	34	/PDIAG	E/A
E	ADDR0	35	■	■	36	ADDR2	E
E	/CS0	37	■	■	38	/CS1	E
E/A	/DASP	39	■	■	40	GND	E